CHEMA FOAM

BUILD YOUR DREAM

CHEMA ULTRA LIGHT

NEXT GENERATION
THERMAL INSULATION &WATERPROOFING
ACRYLIC COATING



A single component, Flexible Thermal Insulation & Waterproofing coating for various applications.

Technical Data	
Color	White
Density	0.80± 0.05 kg/liter
PH Value	8±1
Storage	During storage keep the product tightly closed at temperatures not exceeding 30 °C. When the package is opened and not fully used, it's recommended to keep the lid closed tightly using plastic wrap to protect from air/dry.
Shelf life	12 month when unopened.
Packaging	30 kg plastic drum.
Consumption Rate	4 ±0.5 Kg/m^2

CHEMA ULTRA LIGHT

A single component, Flexible Thermal Insulation & Waterproofing coating for various applications.

PROPERTIES

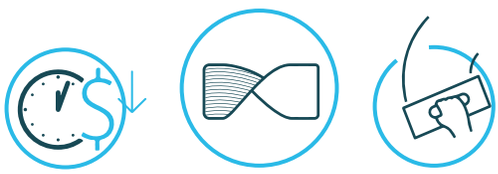

PROPERTIES

- Flexible coating.
- Resistance to moisture and water.
- Thermal insulation coating.
- provide superior energy efficiency
- Good bonding to different surfaces.
- Good resistance to Sun light and UV rayes.
- Environmentally Friendly.
- Easy to use and apply

AREA OF USE

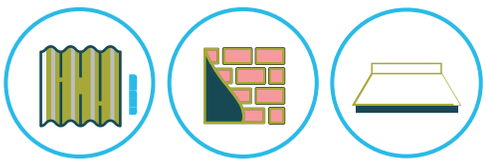

AREA OF USE

- Metal roof.
- wood roof.
- Roof tiles,concrete roof coating .

METHOD OF APPLICATION



NOTES :

- Ensure dust, dirt and foreign matter are removed before Coating Chema Ultra Light.
- For metals should be applied Chema Ultra Light over a recommended anti-corrosive coating scheme.
- Chema Ultra Light is ready to use.
- Stir to ensure a uniform mixture before use.
- Apply Chema Ultra Light with, a trowel, brush
- Clean hands, tools and equipment promptly with soap and warm water.

FACTORY

10th of Ramadan
B4 industrial zone