



CHEMA FOAM

BUILD YOUR DREAM

CHEMA FLEX 200

NEXT GENERATION
WATERPROOFING
ACRYLIC



Product Data


Colour	White - Other colours available upon request
Packaging	5 - 15 kg plastic pails
Shelf Life	12 months when unopened
Toxicity	Non-Toxic under relevant health and safety codes
Storage	Store containers in a clean dry area protected from direct sunlight and extreme heat and cold.

Technical Data

Description	Unit	Value	Tolerance	Test Standards
Density	Kg/Liter	1.34	±0.05	-
Solid Content	%	62%	-	ASTM D1644
Adhesion Strength	N/mm ²	1.8	-	ASTM D4541
Elongation at Break	%	>200	-	D-2370
PH Value	-	8	±1	-
Crack Bridging	mm	1.5	-	ASTM C1305

High flexible waterproofing product a single component acrylic base for various applications.


PROPERTIES

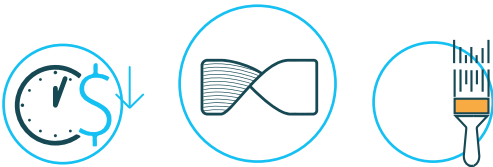

PROPERTIES

- Single component--no mixing required.
- Easily applied--can be applied by non-skilled labor.
- High flexibility.
- Good bonding to new or old coated metal.
- Fast drying.
- Good resistance to UV, water and moisture.
- Salts resistance and weatherproof.

AREA OF USE

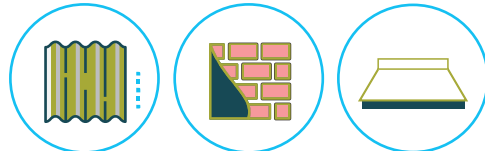

AREA OF USE

- Metal roof, wood roof.
- Roof tiles, concrete roof coating .
- Waterproofing of Wet Areas.
- (under-tile) in bathrooms, kitchens, balconies.

CONSUMPTION



Flex paint
15 Kg



15 m²
(2 coats)

INSTALLATION



NOTES :

- Clean up equipment or tools with Water immediately after use.
- Cured material can be removed mechanically.
- Apply the coat using a paint roller or a brush.
- Apply the second layer after 4 hours, when the first is dry, in the opposite direction of the first layer.

OFFICE

Tel : (+202) 22 635 129 - 240 382 59
Fax : (+202) 22 609 332
11 Obour Buildings - Salah Salem
Nasr City Cairo - Egypt.

FACTORY

Tel : (+20554) 501243
Fax : (+20554) 501243
10th of Ramadan
B4 industrial zone

