



CHEMA FOAM

BUILD YOUR DREAM

CHEMA FLEX 200+

NEXT GENERATION
WATERPROOFING
ACRYLIC



Product Data

Colour	White - Other colours available upon request.
Packaging	20 kg plastic pails.
Shelf Life	12 months when unopened.
Toxicity	Non-Toxic under relevant health and safety codes.
Storage	Keep the product tightly closed at temperatures not exceeding 35°C.

Technical Data

Description	Unit	Value	Tolerance	Test Standards
Density	Kg/Liter	1.3	± 0.1	-
Adhesion Strength	N/mm ²	2	-	ASTM D4541
Elongation at Break	%	>300	-	D-2370
PH Value	-	8	± 1	-


High flexible waterproofing product a single component acrylic water base for various applications and heat reflective liquid membranes.

PROPERTIES



- Flexible coating.
- High resistance to moisture and water.
- Thermal insulation coating.
- Good bonding to different surfaces.
- Good resistance to sunlight rays.
- Does not support the growth of fungus.
- Environmentally friendly.
- Can be reinforced with fiberglass mesh between layers of paint for strengthening.
- Easily applied.

AREA OF USE

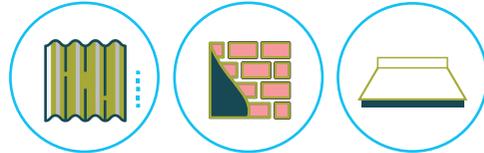

- Metal roofs.
- Wooden roofs.
- Roof tiles(Like: Ceramic).
- concrete roofs.

CONSUMPTION



Chema Flex 200+
20 Kg



20 m²
(2 coats)

INSTALLATION



NOTES :

- Apply the coat using a brush.
- Apply the second layer after 4 hours, when the first is dry, in the opposite direction of the first layer.
- Clean up equipment or tools with Water immediately after use.
- Cured material can be removed mechanically.

OFFICE

1 | Obour Buildings - Salah Salem
Nasr City Cairo - Egypt.

FACTORY

10th of Ramadan
B4 industrial zone

